
SEAL WRAP™



WATER ACTIVATED FIBERGLASS WRAP SYSTEM

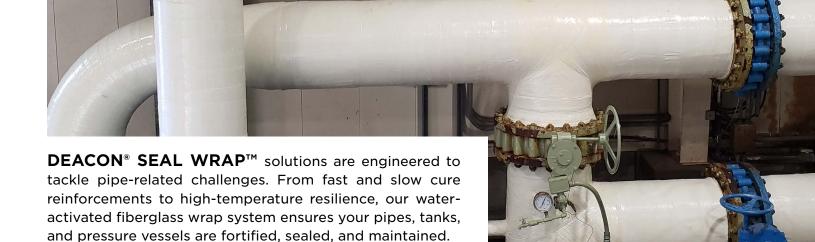

APPLICATIONS

BENEFITS

- Leak Repair
- Structural Reinforcement Cures in Minutes
- Impact Protection
- Abrasion Resistance
- Quick and Easy Installation
- Restores Piping Beyond **Original Capacities**
- Safe, Nontoxic, and Odorless

CHEMICAL RESISTANCE

0112111011211201011	
Alcohols	Excellent
Alkalis ————	Excellent
Dilute Inorganic Acids ———	Very Good
Hydrocarbons	Excellent
Organic Acids	Good
Salts	Excellent
Solvents —	—— Good
	Alkalis Dilute Inorganic Acids Hydrocarbons Organic Acids Salts

Available in three versions to fit your application needs.

	Deacon Seal Wrap	Deacon Seal Wrap FC	Deacon Seal Wrap SC
Characteristic	High-Temp & Extreme Chemical Resistance	Fast-Curing	Slow-Curing
Cure Time 77°F (25°C)	15 minutes	5 minutes	30 minutes
Max Temp Rating	425°F (218°C)	250°F (121°C)	250°F (121°C)
Color	White	Black	White
Available Sizes	2" x 5' 2" x 30' 4" x 15' 4" x 30' 6" x 25' 12" x 30'	4" x 15'	4" x 30'

Learn more

jetlube.com/product/ seal-wrap-wateractivated-wrap

