

The background of the cover is a photograph of an industrial oilfield. In the foreground, several large, dark, threaded pipes are stacked horizontally. The pipes have a prominent spiral thread pattern. In the background, a complex steel structure with yellow safety railings and ladders is visible, with a few workers in orange safety gear standing on different levels. The sky is clear and blue. The overall scene is brightly lit, suggesting a sunny day.

***JET-LUBE***<sup>®</sup>

**OILFIELD,  
OCTG & VALVE  
MAINTENANCE  
PRODUCT CATALOG**

**jetlube.com**

The place to go to get Safety, Tech and Product Data Sheets (SDS/TDS/PDS), product information, company news and more.





# **extreme** Technology for **extreme** Conditions

With more than 75 years of research with development, testing and manufacturing, Jet-Lube® has developed a broad line of oilfield, tubulars and valve products, to include Drilling and OCTG Compounds, Greases, Valve Sealants & Lubricants, Anti-Seizes, Thread Sealants, Cleaners & Degreasers and More.

Every Jet-Lube product is meticulously developed, manufactured, and inspected to the industry's most comprehensive and rigorous quality control standards. Jet-Lube products are manufactured in an ISO 9001:2015 and ISO 14001:2015 Facility. Headquartered in the United States and facilities in Canada and the United Kingdom. Jet-Lube has earned its place as an established leader worldwide in the lubrication industry.

Whatever your application, Jet-Lube has the right product to solve your lubrication needs. Through our experienced R&D lab, Jet-Lube has the ability to create customized products for unique conditions, environmental regulations and to meet the toughest application requirements.

## **Table of Contents**

---

Environmental Compound Formulas	2
Drill Collar & Tool Joint Compounds	2-3
Metal-Free Drill Collar & Tool Joint Compounds	4
OCTG Running Compounds	5-6
Thread Compound Usage	6
Oilfield Specialty Products	7
Valve Sealants & Lubricants	8, 9, 12
Application Chart	10-11
Anti-Seizes	13
Greases	14
Thread Sealants	15
Lubricants for Open Gear & Wire Rope Applications	16
Penetrants, Coatings & Specialty Products	17-18
Cleaners & Degreasers	18
Reference	19-20

## ECF - Environmental Compound Formulas

Since 1949, Jet-Lube® has been formulating and testing environmentally acceptable compounds. Today, we offer alternatives that exceed the most stringent mandated performance and environmental requirements for offshore and onshore drilling operations worldwide. Now, JET-LUBE's environmentally sensitive greases and lubricants join our thread compounds in meeting Norway's Yellow (SFT) and the United Kingdom and the Netherland's "E" classification by CEFAS. These

classifications are the most rigid environmental requirements to date and are part of the effort to apply "green" standards and practices throughout all industries worldwide. To meet the OSPAR Commission's Harmonized Offshore Chemical Notification Format (HOCNF) directives, compounds are required to be biodegradable, bioaccumulation-potential free and nontoxic to all the life forms tested.



### Metal-Free & Extreme Temperature Thread Compounds

### Workover, Subsea & Open-Gear Greases & Lubricants

#### RUN-N-SEAL® ECF™

A high-pressure sealant alternative for larger clearance connection designs such as API buttress, TENARIS TS-ER & DINO-VAM.

#### SEAL-GUARD™ ECF™

Specifically formulated for mechanical seal connection designs and high alloy, prone to galling steel connections.

#### NCS-30® ECF™

A premium, nonmetallic drill string compound with superior galling resistance, adhesion and water resistance.

#### HPHT THREAD COMPOUND™

Contains a wider service range and better shoulder torques on heavy wall and high chrome and nickel alloys.

#### JACKING SYSTEM GREASE ECF™

For jacking systems, slides, cantilever-type rigs and any heavily loaded gear equipment.

#### WIRE LINE LUBRICANT ECF™

Formulated to extend and protect your slick braided and electric wireline.

#### ALCO-EP™ ECF™

A long-lasting, highly water-resistant, multi-purpose grease. Excellent for subsea, as well as topside moving components. Approved for use on RC-4S and ALT-2 connection types.

## Drill Collar & Tool Joint Compounds

(Conforms with API RP 5A3 for use with rotary shouldered connections.)

#### KOPR-KOTE®

##### Drill Collar & Tool Joint Compound

0°F (-18°C) to 450°F (232°C) • Friction Factor: 1.15 (Relative to API RP 5A3 Annex I)

KOPR-KOTE sets the industry standard for premium copper-based drilling compounds. It is also one of the few copper compounds to be granted a marine-pollutant exception by the DOT. KOPR-KOTE is uniquely formulated to prevent excessive circumferential make up and has a very high static friction factor that helps prevent downhole joint make up when excessive drilling torques are encountered. It prevents galling and seizure and allows easy breakout. KOPR-KOTE is recommended for all oilfield threads: drill pipe, collars, tools and jacking systems.



#### KOPR-KOTE® ARCTIC

##### Drill Collar & Tool Joint Compound

-65°F (-54°C) to 300°F (149°C) • Friction Factor: 1.15 (Relative to API RP 5A3 Annex I) (Note: Base oil pour points can vary effecting the range)

KOPR-KOTE ARCTIC is the more pumpable or sprayable version of the standard grade of KOPR-KOTE. It is an unleaded compound containing copper flake, graphite, and other natural extreme pressure and anti-wear additives. KOPR-KOTE ARCTIC's solids package is formulated to prevent excessive circumferential makeup by increasing the coefficient of friction under compressive forces. As stress levels rise above 50% of yield, the friction factor increases, limiting downhole makeup. Full hydraulic joint efficiency is maintained allowing joint shoulder faces to mate completely without standoff or deformation.



## **KOPR-KOTE® GEOTHERMAL Drill Collar & Tool Joint Compound**

0°F (-18°C) TO 700° (370°C) • Friction Factor\* 1.15  
(Relative to API RP 5A3 Annex I) • Contains no lead or zinc

KOPR-KOTE GEOTHERMAL is a high-performance, lead-free compound formulated for rotary-shouldered connections, including drill collars and tool joints. It combines a proprietary blend of copper flake, graphite, and natural extreme pressure (EP) and anti-wear additives, suspended in a thermally stable Bentone clay thickener. The compound is engineered to provide superior protection, control makeup torque, and maintain joint integrity under extreme high temperature, vibration and pressure conditions. Ideal for use in geothermal drilling operations, where extreme thermal cycling and torque demands require reliable thread compound performance at elevated temperatures and under harsh downhole conditions.



## **EXTREME® Mud Resistant Drill Collar & Tool Joint Compound**

0°F (-18°C) to 450°F (232°C) • Friction Factor:  
1.15 (Relative to API RP 5A3 Annex I)

EXTREME is a premium-quality, unleaded compound blended into JET-LUBE's high-temp, mud-resistant, complex-base grease which also offers extended storage capability. It prevents excessive circumferential make up by increasing the coefficient of friction under compressive forces. As stress levels rise above 50% of yield, the friction factor increases, limiting downhole make up. Full hydraulic joint efficiency is maintained allowing joint shoulder faces to mate completely without standoff or deformation. EXTREME has an exception from the DOT's marine-pollutant labeling requirements.



## **KOPR EXT FF 1.0 Drill Collar & Tool Joint Compound**

0°F (-18°C) to 450°F (232°C), Arctic: -40°F (-40°C)  
to 450°F (232°C) • Friction Factor: 1.0 (Relative to  
API RP 5A3 Annex I)

KOPR EXT FF 1.0 is a modification of JET-LUBE® EXTREME®. It's designed with a lower coefficient of friction to be used where rig tong and/or iron roughneck units lack the torque capacity to reach the optimum engagement of higher torque connections. KOPR EXT FF 1.0 still offers the advantage of superior adhesion, improved EP and anti-wear properties, resistance to water wash-off, and superior rust and corrosion protection in the presence of invert or high-pH muds. Available in Arctic.



## **JLS® Tool Joint Compound**

0°F (-18°C) to 450°F (232°C) • Friction Factor:  
1.1 (Relative to API RP 5A3 Annex I)

JLS TOOL JOINT COMPOUND is economical and contains premium-grade copper flakes, amorphous graphite, extreme pressure additives, rust and corrosion inhibitors and other special purpose ingredients at lower doses to be used in less severe drilling applications. JLS is recommended for use on tool joints in drilling medium-depth formations. It provides consistent control of make up, break out, galling and seizure.



## **21® Double-Duty Drill Collar & Tool Joint Compound**

0°F (-18°C) to 450°F (232°C), Arctic: -65°F (-55°C) to  
300°F (149°C) • Friction Factor: 1.15 (Relative to API  
RP 5A3 Annex I)

21 is a high-quality product designed for less severe applications than KOPR-KOTE. It is formulated to prevent excessive circumferential make up of tool joints and protects against galling and high stress to prolong thread and shoulder life.

21 is designed for use as a tool joint compound for consistent control of make up and break out. It may also be used on collars in less severe drilling conditions. The high-dynamic friction factor helps prevent excessive downhole make up and bellling out of box members. 21 has an exception from the DOT's marine-pollutant labeling requirements and some extended storage properties. Available in Arctic.



## **Z-50™ Zinc Tool Joint Compound**

0°F (-18°C) to 300°F (149°C) • Friction Factor: 1.0  
(Relative to API RP 5A3 Annex I)

Z-50 contains prime grade zinc and is formulated with 50% metallic zinc, meeting the metallic zinc requirements described in API RP 5A3 Annex 1. It contains special additives to reduce the plating and buildup of metallic zinc encountered with other zinc compounds. They ensure consistent floor make up and are brushable over a wide temperature range. Z-50 adhere to all surfaces, resist water wash-off and prevent rust and corrosion.



## **LBX-SPECIAL Double-Duty Tool Joint & Drill Collar Compound**

0°F (-18°C) to 400°F (232°C) • Friction Factor: 1.15  
(Relative to API RP 5A3 Annex I)

LBX-SPECIAL, an environmentally-friendlier copper-based, double-duty drill collar and tool joint compound, has been formulated to provide a superior level of performance for the increasing demands of today's oilfield market. The lead and zinc free formulation contains copper flake as the only metallic component and is fortified by a unique blend of natural, inorganic, extreme pressure, and anti-wear additives. LBX-SPECIAL utilizes our EXTREME base grease which is resistant to invert or high-pH muds and provides better pipe storage properties. Only available in Canada.



# Metal-Free Drill Collar & Tool Joint Compounds

## NCS-30®

### Drill Collar & Tool Joint Compound

NSF H2 & NSF 61 Registered • Oilfield/Mining/Construction Drilling / -20°F (-29°C) to 500°F (260°C), Industrial Anti-Seize Applications / -65°F (-54°C) to 2600°F (1427°C) • Friction Factor: 1.15 (Relative to API RP 5A3 Annex I) • Conforms with API RP 5A3 for use with rotary shouldered connections.

NCS-30 is a premium-quality, nonmetallic compound containing carbon-based fibers and additives and other natural extreme pressure and anti-wear additives. These additives are blended into JET-LUBE's high-temp, calcium-complex base grease, which also offers extended storage capability to NCS-30. This base grease offers the additional advantage of superior adhesion to wet steel and resistance to water wash-off. NCS-30 is especially effective for invert or high-pH muds.



## NCS-30® ARCTIC

### Drill Collar & Tool Joint Compound

Oilfield/Mining/Construction Drilling / -40°F (-40°C) to 350°F (177°C), Industrial Anti-seize Applications / -65°F (-54°C) to 2600°F (1427°C) • Friction Factor: 1.15 (Drill Strings) (Relative to API RP 5A3 Annex I) • Conforms with API RP 5A3 for use with rotary shouldered connections.

NCS-30 ARCTIC is a premium-quality, nonmetallic, nonconductive compound containing carbon-based fibers and additives and other natural extreme-pressure and anti-wear additives. These are blended into JET-LUBE's all-weather calcium complex base grease. This base grease offers the additional advantage of low temperature application and service, superior adhesion to wet steel surfaces, resistance to water wash-off, and most drilling muds. NCS-30 ARCTIC offers the same protection as regular NCS-30, but at lower service temperatures.



## NCS-30® ECF™

### Drill Collar & Tool Joint Compound

NSF H2 & NSF 61 Registered • -10°F (-23°C) to 500°F (260°C) • Friction Factor: 1.0 (Relative to API RP 5A3 Annex I) • Conforms with API RP 5A3 for use with rotary shouldered connections.

This biodegradable, nonmetallic formula meets Norway "Yellow", British and Dutch "E" HOCNF classifications. NCS-30 ECF's extreme pressure and anti-wear additives control friction and galling. It resists wash-off and sticks to wet pipe. NCS-30 ECF withstands invert and high-pH muds and is non conductive for MWD. This tool joint & drill collar compound is excellent for high-chrome or nickel alloy connections in extreme temperature service. The complex grease carrier in Jet-Lube NCS-30 ECF allows it to provide extended storage capability.



## KOV'R-KOTE®

### Double-Duty & Tool Joint Compound/Sealant

0°F (-18°C) to 450°F (232°C) • NSF H2 Registered • Friction Factor: 1.0 relative to API-MODIFIED • Exceeds all performance specs described in API specification 5CT and set forth in API Recommended Practice 5A3

The unique blend of polymers, graphite and friction-reducing additives makes KOV'R-KOTE ideal for drill collars, drill pipe and tubing and it can be used for bottom hole assemblies. This metal-free formula was developed to replace compounds containing zinc, copper and heavy metals with similar frictional properties.

While maintaining multifunctional capabilities, KOV'R-KOTE is recommended for use on shouldered and interference threads and is ideal for small and large diameter drill pipe.



## ECO-SAFE™

### Thread Compound

NSF 61 Registered • Pumpable: -20°F (-29°C) to 500°F (260°C) / Sprayable: -40°F (-40°C) to 500°F (260°C) • Friction Factor: 1.0 (Relative to API RP 5A3 Annex I)

ECO-SAFE is a nontoxic, nonmetallic compound containing carbon-based fibers and additives with other natural extreme pressure and anti-wear additives. These are blended into Jet-Lube's high temp calcium complex base grease. This base grease offers the additional advantage of superior adhesion to wet steel surfaces, resistance to water wash-off, and most drilling fluids. Especially effective for invert or high-pH fluids. Available in Pumpable & Sprayable.



## THREAD SHIELD

### Thread Compound

- 22°F (-30°C) to 535°F (280°C) | Brusable from - 10°F (-23°C) to 446°F (230°C)

THREAD SHIELD is a purpose-designed thread compound for drill rod connections. The special nonmetallic components will aid in the assembly and disassembly of drill rods without damaging the threaded surfaces. THREAD SHIELD contains inert fibers, extreme pressure and anti-wear additives. This unique combination of environmentally acceptable materials will prolong the life of highly engineered drill rod connections by preventing rust and corrosion, galling and seizing.



# OCTG Running Compounds

(Conforms with API 5A3 for use with casing, tubing, and line pipe.)

## RUN-N-SEAL® ECF™

### Metal-Free Thread Sealant

-20°F (-29°C) to 450°F (232°C) • Friction Factor: 1.0 relative to API-MODIFIED • O Spar Commission-HOCNF (Harmonized Offshore Chemical Notification Format) • Classification: "Yellow" rating for Norway • "E" for the United Kingdom and Netherlands

RUN-N-SEAL ECF is a high-pressure sealant alternative for API Buttress and other larger clearance thread seal connection designs. It is brushable over a wide range of temperatures and has excellent inherent water resistance. RUN-N-SEAL ECF sticks to wet and oily steel, ensuring the compound will not wash-off threads.



## SEAL-GUARD™ ECF™

### Yellow/"E"-Rated Premium Connection Thread Compound

Biodegradable • Metal-free • Frictional properties similar to API MODIFIED • -20°F (-29°C) to 450°F (232°C) • Friction Factor: 1.0 relative to API-MODIFIED • O Spar Commission-HOCNF (Harmonized Offshore Chemical Notification Format) • Classification: "Yellow" rating for Norway • "E" for the United Kingdom and Netherlands

SEAL-GUARD ECF is specifically formulated for mechanical seal thread designs and high-alloy steel materials. The smaller particle size distribution may not provide optimum sealability on 8-round and buttress thread forms.



## HPHT™ THREAD COMPOUND

### High Pressure/High-Temp Thread Compound

Biodegradable • Ideal for high-chrome connections • Environmentally Safe • Metal-free • Low volatility at temperatures up to 232°C • Rating: -30°F (-34°C) to 450°F (232°C) • Friction Factor: 1.0 relative to API-MODIFIED

HPHT Thread Compound is specifically formulated to meet high performance requirements of proprietary, metal-to-metal seal and high interference connection designs. This compound utilizes today's high-performance materials, which include "super chrome" and high-alloy steels.



## ThreadSeal™

### Lead/Zinc-Free Thread Compound

No lead or zinc, eliminating the potential for hydrogen gas evolution • H<sub>2</sub>S inhibited • Rating: 0°F to 500°F (-18°C to 260°C) | Brushable Temp: 10°F (-12°C) • Friction Factor: 1.0 relative to API-MODIFIED

ThreadSeal represents the next generation—environmentally responsible, high-performance thread compound—tailored to meet today's demanding oilfield applications. Serving as a superior alternative to API-Modified, ThreadSeal offers robust sealing, anti-seize protection, and long-term corrosion resistance under extreme pressure conditions. This lithium-based thread compound contains copper, graphite, and a blend of nonmetallic, inorganic, extreme pressure, and anti-wear additives. Its high-quality lithium base grease provides a high melting point and excellent water resistance, allowing it to adhere effectively to wet or oily threads.



## RUN-N-SEAL® EXTREME®

### Metal-Free Thread Sealant

-13°F (-25°C) to 446°F (230°C), Arctic: -40°F (-40°C) to 392°F (200°C) H<sub>2</sub>S inhibited • Friction Factor: 0.9 relative to API-MODIFIED

RUN-N-SEAL EXTREME is a nonmetallic, high-pressure sealant for API connections (buttress and 8-round) and storage compound. This compound is not intended for use on mechanical seal connections. RUN-N-SEAL EXTREME contains graphite and other nonmetallic, inorganic, anti-wear additives blended into a state-of-the-art, high temperature, rust-inhibiting complex soap-based grease. RUN-N-SEAL EXTREME has been tested for California Code and is not classified as a hazardous waste. It is nontoxic, even in a marine environment, as evidenced by test results on the California Hazardous Waste Assessment Bioassay and a "D" rating in the North Sea (OSPAR) Guidelines. Available in Arctic.



## RUN-N-SEAL® EXTREME® AWG

### All Weather Grade, Metal-Free Thread Sealant

Nontoxic • -22°F (30°C) to 446°F (230°C) Brushable Temperature: -40°F (-40°C) • Friction Factor: 0.9 relative to API-MODIFIED

RUN-N-SEAL EXTREME AWG is a metal-free, high-pressure sealant alternative versus API-MODIFIED for OCTG 8-round and buttress connections. This compound contains graphite and other nonmetallic, inorganic, anti-wear additives blended into a state-of-the-art, all weather, rust inhibiting complex soap based grease.



## SEAL-GUARD™

### Proprietary Connection Thread Compound

Environmentally safe • Metal-free • H<sub>2</sub>S inhibited • Rating: -20°F (-29°C) to 450°F (232°C) • Friction Factor: 1.0 relative to API-MODIFIED

This nonmetallic thread compound design provides optimum galling resistance and frictional properties in the make up of high-chrome, proprietary designs (metal to metal seals, as well as API 8 round designs).



## CURÄL™

### Work Over/Non-Critical Tool Joint Compound

0°F (-18°C) to 450°F (232°C) • Friction Factor: 1.1 for OCTG relative to API-MODIFIED | 1.1 for Drill String Tool Joints & Drill Collars

CURÄL is a thread compound developed for non critical drilling, work over and production applications. Nonmetallic, environmentally acceptable, special additives enable CURÄL to also be used for lubricating, sealing and storage of drilling and production equipment. It can also be used as an alternative to API-MODIFIED on carbon steel alloys.



**Note: Not for use on mechanical seal designs.**

# OCTG Running Compounds

(Conforms with API 5A3 for use with casing, tubing, and line pipe.)

## API-MODIFIED High Pressure Thread Compound

0°F (-18°C) to 400°F (205°C) • Friction Factor: 1.0  
(Relative to API RP 5A3)

API-Modified is a high-pressure thread compound that conforms to and exceeds the requirements of API Bulletin 5A2 and R.P. 5A3. It is formulated with JET-LUBE's unique grease base, which tenaciously adheres to wet or oily surfaces and provides brushability throughout the service range. API-Modified seals and withstands pressures to 10,000 psi, on API connections and greater on mechanical seal designs. It resists wash-off and will not harden or dry.



## MODIFIED-LZF™ Lead/Zinc-Free High-Pressure Thread Compound

0°F (-18°C) to 450°F (232°C) • H2S inhibited •  
Friction Factor: 1.0 relative to API-MODIFIED

MODIFIED-LZF is a patented, high-pressure sealant and anti-seize compound designed as a lead-free alternate for API-MODIFIED. This compound contains copper flake and graphite as well as other nonmetallic, inorganic, extreme pressure, and anti-wear additives. It has a balanced package of rust, corrosion, and oxidation inhibitors blended into a high-quality aluminum complex base grease. The aluminum complex grease provides a high melting point and excellent inherent water resistance; allowing it to stick to wet steel and ensuring that the compound will not wash off threads.



## Thread Compound Usage

Easily determine the amount of compound required for your threaded connections here: [www.jetlube.com/thread-compound-calculator](http://www.jetlube.com/thread-compound-calculator) or scan QR



Drill Collar & Tool Joint Size								
	4.5"	5"	5.5"	6.625"	7"	7.625"	8.625"	9.625"
mm	114.3	127	139.7	168.28	177.8	193.68	219.08	244.48
Compound OZ/PIN	2.75	3.00	3.75	4.25	5.50	7.25	9.00	9.50
Grams	77.96	85.05	106.31	120.49	155.92	205.53	255.15	269.32
Joints* PINS/GAL	51	46	42	34	30	23	17	14

Tubing Size				
	2.375"	2.875"	3.5"	4"
mm	60.33	73.03	88.90	101.60
Compound OZ/PIN	0.66	0.80	0.88	1.12
Grams	18.71	22.68	24.95	31.75
Joints* PINS/GAL	194	160	128	114

Casing Size														
	4.5"	5"	5.5"	6.625"	7"	7.625"	8.625"	9.625"	10.75"	11.75"	13.375"	16"	18.625"	20"
mm	114.3	127	139.7	168.28	177.8	193.68	219.08	244.48	273.05	298.45	339.73	406.40	473.08	508.00
Compound OZ/PIN	1.88	2.09	2.30	2.76	2.93	3.19	3.61	4.03	4.50	4.92	5.60	6.70	7.79	8.37
Grams	53.30	59.25	65.20	78.24	83.06	90.43	102.34	114.25	127.57	139.48	158.76	189.94	220.84	237.29
Joints* PINS/GAL	68	61	55	46	44	40	35	32	28	26	23	19	16	15

# Oilfield Specialty Products

## ALCO-EP™ ECF™

### Extreme-Service Grease

-10°F (-23°C) to 450°F (232°C) • Ospar Commission-HOCNF (Harmonized Offshore Chemical Notification Format) • Classification: "Yellow" rating for Norway • "E" for the United Kingdom and Netherlands

ALCO-EP ECF is a premium, state-of-the-art, multipurpose, biodegradable grease containing a highly synergistic blend of rust and oxidation inhibitors plus extreme pressure and anti-wear additives for maximum performance. This extreme service grease is an excellent choice for subsea or other conditions where extreme water resistance is necessary, its non-plating, organic extreme pressure, anti-wear additives allow ALCO-EP ECF to be used where tolerances are tight and/or speeds are high.



## WIRE LINE LUBRICANT ECF™

### Slick / Electric Braided Wireline Lubricant

-20°F (-29°C) to 500°F (260°C) • Ospar Commission-HOCNF (Harmonized Offshore Chemical Notification Format) • Classification: "Yellow" rating for Norway • "E" for the United Kingdom and Netherlands • No VOC's

WIRE LINE LUBRICANT ECF is a VOC-free unique product for wire line applications where a grease-type lubricant is required. This easy flow formula will stick to the wire line and penetrate it for added protection and extended life. WIRE LINE LUBRICANT ECF is H<sub>2</sub>S inhibited and has unique capabilities as a preservative against rust and corrosion. It offers excellent protection against extended exposure to elements and UV rays. WIRE LINE LUBRICANT ECF can be applied by hand or through a pneumatic lubrication system.



## TF-15®

### Metal-Free Thread Sealing Compound

Application: -30°F (-34°C) to 200°F (93°C) | Sealing: to 600°F (315°C) • H<sub>2</sub>S inhibited • Contains PTFE & Graphite • Friction Factor: 0.7 relative to API-MODIFIED • Conforms with API 5A3 for use with casing, tubing, and line pipe

TF-15's PTFE formula aids in the make up of large-diameter casing by providing a lower coefficient of friction than API-MODIFIED. TF-15 provides excellent protection against galling and wear, seals badly worn threads and greatly increases connection life. This sealant is recommended for use as a sealant on fiberglass tubing and casing threads as well as VAM BIG OMEGA. TF-15 is particularly useful in areas subject to H<sub>2</sub>S and salt water and in applications subject to vibration, pressure surge and temperature fluctuations.



**Note: Not for use with oxygen or strong oxidizers such as hydrogen peroxide or sulfuric acid.**

## AP-5™

### High-Temp Multipurpose Grease w/Moly

0°F (-18°C) to 550°F (288°C) • Contains Molybdenum Disulfide

Formulated from bentone clay, AP-5 is noted for its high temperature insensitivity, its non-melting and does not thicken excessively at temperatures as low as 0°F (-18°C). It has mechanical stability, is water resistant, displays high stability, provides excellent adhesion to metals, prevents wear and has superior storage life. AP-5 contains molybdenum disulfide, oxidation inhibitors, corrosion inhibitors and metal deactivators. It offers positive protection for extreme services, which require heavy duty lubricant performance. Ideal for oven chains.



## KORR-GUARD™

### Storage Compound

- 20°F (-29°C) to 425°F (218°C)

KORR-GUARD is a water-displacing, semi-fluid grease. It flows into the thread roots, displacing moisture, cutting oils and residual threading materials. KORR-GUARD will allow the thread protectors to completely engage the pipe threads and aid in eliminating moisture penetration to the newly threaded or recut threaded areas. KORR-GUARD does not run or drip off the threads.

This unique blend of rust and corrosion inhibitors, made into a grease-type product is ideal for short or long-term storage of casing, tubing, drill pipe, or any metal surface requiring protection from the elements. KORR-GUARD is ideally suited for extremely humid or salt water environments. KORR-GUARD can be applied by a brush and will not harden over time, therefore, this product can be removed by using a rag or cleaner.



## MP-50™

### Multipurpose Non-Melting MoS<sub>2</sub> Paste

50% Molybdenum Disulphide Paste • Brushable • Color - Black • -300°F (-185°C) to 750°F (400°C) • Organic Clay Mixture with Molybdenum Disulphide • Non-Melting Formula • 300,000 psi Contact Stress Load • NAVSEA TMS S 9958-AA-MMA-100

MP-50 was developed for applications where extreme high loads are present, like center bowl lubrication points for rail cars and walking cams for dragline cranes. This product is highly saturated with MoS<sub>2</sub> (Molybdenum Disulphide) in a thick non-melt, grease base for stay put properties. MP-50 is designed to handle high pressure and high heat applications like mandrel forming presses, and is used as a valve stem lubricant for many OEM valve manufacturers.



## JET-LOK® III

### Zinc-Free Threadlocker, Two-Part Epoxy

Available as a complete Handy Pak or Kit • 1 hr. cure time

JET-LOK III can be used to permanently lock threaded connections under normal operating conditions. JET-LOK III uses a new catalyst for added pot life and durability with lower toxicity and less heat generation, making it the optimum choice for its recommended applications. It is specially designed for use on all threaded joints or fasteners where an exceptionally strong and durable bond is required. Ideal on drilling tools, casing, and other tubulars where the effective prevention of joint loosening is required.



# Valve Sealants & Lubricants

## EZY-TURN® #2 Gate/Plug Valve Body Fill Lubricant

-20°F (-29°C) to 450°F (232°C) • Color - Amber • H<sub>2</sub>S inhibited • Injectable

EZY-TURN #2 is a hydrocarbon-resistant, general-purpose gate valve sealant. This lubricant is blended from chemically stable and naturally corrosion-resistant vegetable oils. EZY-TURN #2 contains no solid fillers and is easily pumped with a high-pressure lubricator at temperatures as low as 0°F (-18°C).

Applications: Condensate, crude, kerosene, jet fuels, dilute acids, dilute alkalis, hydrocarbon gases and hydrocarbon liquids.



## EZY-Turn® #4 Plus Multipurpose Valve Sealant w/MoS2

>-40° °F (-40°C) to >450°F (232°C). It can retain its consistency at 500°F (260°C) within a valve where oxygen contact is excluded • Color: Grey to Black

EZY-TURN #4 PLUS is ideal for applications requiring moisture & hydrocarbon resistance. It is pumpable to temperatures as low as -40°F (-40°C) when used with a high-pressure lubricator and with the softer consistency is more easily pumped for hydraulic fracturing applications. It has very good hydrochloric acid resistance but also has additives to neutralize the harmful effects of hydrochloric acid in valves pulled from Frac service.

Applications: Recommended for use in gate, ball and globe valve applications requiring aliphatic hydrocarbon and acid resistance or where high and low temperature extremes are encountered. Suitable for valves used in hydraulic fracturing.



## EZY-TURN® #3 Valve Sealant Body Fill Lubricant w/MoS2

0°F (-18°C) to 500°F (260°C) • Color: Black

Specifically designed for light hydrocarbon liquids and gases, making it the sealant of choice for pipeline and compressor stations. EZY-TURN #3 pumps easily in temperatures as low as 0°F (-18°C) with a high-pressure lubricator. With a blend of vegetable oils and molybdenum disulfide (MoS<sub>2</sub>) as a solid lubricant, EZY-TURN #3 resists all aliphatic hydrocarbons, protects internal plug surfaces and reduces valve operating torque.

Applications: Aliphatic hydrocarbons, butane, fuel oils hot gases, LPG, natural gas and propane.



## EZY-TURN® #7 Ball Valve Sealant

-30°F (-35°C) to 400°F (204°C) • Color: Blue

EZY-TURN #7 is formulated from premium food grade synthetic fluids for maximum hydrocarbon resistance over a broad temperature range. Pumpable and usable at temperatures as low as -30°F (-35°C). It also retains its firm consistency at temperatures as high as 400°F (204°C) when injected into the valve and oxygen contact is avoided. Fortified with inhibitors against H<sub>2</sub>S, rust and oxidation.

Applications: Any application involving aliphatic hydrocarbon product streams. EZY-TURN #7 is resistant to water and aqueous services, but is not recommended for steam service. Ideal for use in ball valves where the temperature range of conventional vegetable oil sealants precludes their use. Particularly well suited for low-temperature applications -30°F (-35°C) to 20°F (-7°C). Will not dissolve in aliphatic hydrocarbon services. Prevents scoring and galling on precision valve surfaces.



## EZY-TURN® #3 ARCTIC Gate/Plug Valve & Body Fill Lubricant

-58°F (-50°C) to 500°F (260°C) • Color: Black

EZY-TURN #3 ARCTIC is a multipurpose valve lubricant and sealant that provides excellent overall resistance to CO<sub>2</sub>, H<sub>2</sub>S, moisture and gases. It's urethane-silicone carrier performs well to temperatures as low as -70°F (-57°C).



## EZY-TURN® #4 Gate Valve & Body Fill Lubricant w/ MoS2

-40°F (-40°C) to 500°F (260°C) • Color: Black

EZY-TURN #4 is formulated from food grade polyester base fluids that provide increased resistance to aliphatic hydrocarbons. When compared with the standard vegetable products, EZY-TURN #4 has superior performance characteristics in both low and high-temperature applications. Lubrication and sealing is enhanced by the addition of molybdenum disulfide, which effectively burnishes into scratches, renewing the surface.



## EZY-TURN® #12 Gate/Plug Valve Body Fill Lubricant

0°F (-18°C) to 250°F (121°C) • Color: Beige-Brown

EZY-TURN #12 is a "peanut butter" type product designed for expanding and other gate valves with body cavities. It can also be used in specific plug valve designs as a sealant. It's recommended for applications where gas or liquid hydrocarbon resistance is required. It is also an ideal general-purpose sealant. EZY-TURN #12 is formulated from vegetable oils and polymers to reduce torque during valve operation while providing a leak-proof seal. It injects into the valve body using a high-pressure lubricator.

Applications: Aliphatic hydrocarbon liquids, crude, dilute acids and alkalis, fuel oils, gasoline, natural gas and water.



## EZY-TURN® PVS Plug Valve Supreme Sealant

-20°F (-28°C) to 600°F (315°C) • Color: Grey to Dark Grey

A biodegradable product specifically designed for large bore plug valves used on zipper manifolds and Frac stacks. It is the sealant of choice for fracking operations. EZY-TURN PVS is formulated from a blend of vegetable oils and contains molybdenum disulfide (MoS<sub>2</sub>) as a solid film lubricant. EZY-TURN PVS is resistant to all aliphatic hydrocarbons and lowers the torque necessary for smooth valve operation while protecting internal surfaces from scoring and galling.

Applications: Recommended for use in any valve application requiring aliphatic liquid and gas resistance. Ideal for fracking operations.



## EZY-TURN® H2S High-Temp/Pressure Valve & Body Fill Lubricant

0°F (-18°C) to 400°F (204°C) • Color: Black

A premium vegetable and synthetic oil sealant, thickened with silicone to provide maximum resistance to H<sub>2</sub>S and hydrocarbon fluids with temperatures as high as 400°F (204°C). This black, tacky compound is waterproof, corrosion resistant and extremely adhesive to all metal surfaces.

Applications: Acid solutions, diesel fuel, hydrocarbon gases and liquids, sour gas, crude and water.



## EZY-TURN® #196 High-Temp/High-Pressure Valve Sealant & Body Fill Lubricant

0°F (-18°C) to 420°F (215°C) • Color: Peanut Butter Brown

EZY-TURN #196 is a premium sealant formulated from a unique blend of high-viscosity, gas-resistant synthetic and vegetable-based oils for use in all valve types. This high-pressure sealant is ideal for service applications involving gases, distillates, dilute acids and steam. EZY-TURN #196 contains special polymeric fibers and other sliding lubricants to enhance sealability in extreme applications. Although designed for expanding gate-type valves, EZY-TURN #196 is used effectively on many other valve types.

Applications: EZY-TURN #196 has been formulated for use in production oilfield situations (pipeline valves) where a variety of service conditions may be required. This is a premium product and should be used where typical solid fillers mandated in the "peanut butter" type sealants do not work. The new polymeric fibers add greater performance for extreme services.



## EZY-OPEN™ Valve Penetrant (Liquid or Gel)

-10°F (-23°C) to 400°F (204°C) • Color: Amber

EZY-OPEN is a valve penetrant designed to penetrate scale, rust, corrosion and old, hardened valve lubricants which can hamper or disable valve operation. EZY-OPEN is specifically formulated from a select group of nonflammable, nontoxic and biodegradable fluids. It is available in a liquid or gel formula. EZY-OPEN contains a powerful dispersant and detergent to aid in the removal of gum and lacquer, metal wetting agents to aid in the penetration of scale and rust, and PTFE to reduce the torque required to break the valve-free.

Applications: Disabled or hard to operate lubricated valves. Excellent for use in any injectable assembly to aid in disassembly.



## EZY-TURN® POLAR Gate Valve Body Fill Lubricant - (Arctic Conditions)

-75°F (-59°C) to 350°F (177°C) • Color: Black

EZY-TURN POLAR is designed for oilfield gate valve lubrication not only for arctic conditions but also as a general purpose product with its broad temperature range. It is resistant to hydrocarbons, hydrogen sulfide, carbon dioxide and water. It remains an effective sealant and lubricant to -75°F (-59°C). This sealant has the most OEM valve approvals.

Applications: Carbon dioxide, sour crude, hydrogen sulfide/sour gas.



## EZY-TURN® BODY FILL Gate Valve Body Fill Lubricant

-20°F (-29°C) to 350°F (177°C) • Color: Black

An economical, petroleum oil-based sealant that readily flows into hard to fill orifices and channels in gate valve body cavities when pumped with a high-pressure lubricator. EZY-TURN BODY FILL is economical where hydrocarbon resistance is not a major concern. It is petroleum based, has good metal adhesion and field studies show it has excellent ability to remain in the body cavity and displace water and foreign material.

Applications: Should be used in situations where economy is a factor and maximum hydrocarbon resistance is not required. Good for close tolerance valves due to metal adhesion and superior flow properties under pressure.



## EZY-TURN® BODY FILL ARCTIC Gate Valve Body Fill Lubricant

-40°F (-40°C) to 300°F (149°C) • Color: Grey to Black

A petroleum oil based sealant suitable for displacing water and foreign material in gate valve cavities. EZY-TURN BODY FILL ARCTIC has proven it has excellent ability to remain in the body cavity during field service even though it is petroleum based. This sealant has outstanding metal-adhesion and readily flows into hard to fill orifices and channels when pumped with a high-pressure lubricator.

Applications: Low-temperature applications where economy is a factor and maximum hydrocarbon resistance is not required. Good for close tolerance valves due to metal adhesion and superior flow properties under pressure.



## EZY-PAK® EXTREME Low "E" Injectable Valve Stem Packing

-40°F (-40°C) to 750°F (400°C) • Conforms to API 624 requirements as a "Certified Low Leak Technology (CLLT)" packing • No VOC

EZY-PAK EXTREME is the industry's first patented low-emissions injectable packing featuring Certified Low Leak Technology (CLLT). Its advanced formulation combines molybdenum disulfide (MoS<sub>2</sub>) and surface-modified oxidation-inhibited graphite, ensuring superior sealing, lubrication, and durability across various temperatures and pressures. Designed for easy injection with conventional injectable guns, it flows smoothly into valve stuffing boxes, effectively preventing rust, oxidation, and corrosion while remaining stable—never hardening or drying out. Ideal for Drill & Tap (D&T) programs and fugitive emissions control, EZY-PAK EXTREME conforms to API 624 requirements as a "Certified Low Leak Technology (CLLT)" packing. EZY-PAK EXTREME FA contains carbon fibers.



# Application Chart

	DRILLING												
	Drill Collars- Severe Duty	Drill Collars- Light to Medium Duty	Suitable for Spray System Application	Tool Joints- Severe Duty	Non-Magnetic/ CRA (Corrosion, Resistant Alloy)/ MWD tools	Tool Joints- Light to Medium Duty	Drill Collars & Tool Joints Light Duty	Workover Strings (FSS 265 & RSC connections)	Large Diameter (.9.5"O.D.) Rotary Shoulder Connections	Large Diameter (.9.5"O.D.) Rotary Shoulder Connections with Torque Limited Drives	API/ 8-Round, Line Pipe	API/ Buttruss	API/ Buttruss- Large Diameter
<b>METALLIC PRODUCTS</b>													
EXTREME	YES	YES		YES	YES	YES	YES	YES	YES	YES			
KOPR EXT FF 1.0	YES	YES		YES	YES	YES	YES	YES	YES	YES			
KOPR-KOTE	YES	YES		YES	YES	YES	YES	YES	YES	YES			
KOPR-KOTE ARCTIC	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES			
KOPR-KOTE GEOTHERMAL	YES	YES		YES	YES	YES	YES	YES	YES	YES			
API-MODIFIED											YES	YES	YES
MODIFIED LZP				YES							YES	YES	YES
21		YES		YES		YES	YES	YES					
LBX SPECIAL (CANADA ONLY)		YES		YES		YES	YES	YES					
JLS		YES		YES		YES	YES	YES					
Z-50		YES				YES	YES	YES					
<b>NONMETALLIC PRODUCTS</b>													
NCS-30	YES	YES		YES	YES	YES	YES	YES	YES	YES			
NCS-30 ARCTIC	YES	YES		YES	YES	YES	YES	YES	YES	YES			
KOV'R- KOTE		YES				YES	YES		YES	YES			
CURAL												YES	YES
RUN-N-SEAL EXTREME											YES	YES	YES
SEAL-GUARD											YES		
TF-15													
THREADSEAL											YES	YES	YES
AP-5													
KORR GUARD													
ALCO-EP 73 PLUS													
RUST-GUARD													
GEAR GUARD													
WLD													
WRL													
OG-H													
THREAD SHIELD	YES			YES	YES	YES		YES		YES			
<b>ENVIRONMENTALLY SAFE PRODUCTS</b>													
NCS-30 ECF	YES	YES		YES	YES	YES	YES	YES	YES	YES			
ECO-SAFE	YES			YES	YES	YES	YES		YES				
ECO-SAFE SPRAYABLE	YES	YES	YES	YES	YES	YES	YES		YES				
HPHT THREAD COMPOUND													
RUN-N-SEAL ECF											YES	YES	YES
SEAL-GUARD ECF											YES		
ALCO-EP ECF													
JACKING SYSTEM GREASE ECF													

PRODUCTION/COMPLETION						RIG MAINTENANCE						STORAGE PROTECTION		
Semi- Premium Including Modified Butress with Seal Features	Proprietary Mechanical Seal Connections	Corrosion Resistant Alloys (More Galling Prone)	Workover strings (PH-6 and Similar Connections)	Fiberglass Connections	Skunch Type & RL-4 and Other Similar Oilfield Connections, Landing Subs With Acme Threads	Jack-Up Legs	Wire Rope & Cable	Winch & Crane Gears	Rotary Table Bushings	Kelly Swivels	Anti-Sieze Compounds (Stud Bolts, Motor Housings, Gland Nuts)	Skunch type & RL-4 and other similar Oilfield Connections	Short Term 6 month (up to 6 month) *	Long Term (> 6 months)*
											YES			YES
											YES		YES	
						YES					YES		YES	
											YES		YES	
YES	YES	YES											YES	
YES	YES												YES	
	YES		YES			YES					YES		YES	
YES														
YES				YES										
YES	YES	YES	YES											
				YES										
YES	YES													YES
					YES									
							YES		YES	YES		YES		YES
							YES	YES						
							YES	YES						
							YES						YES	
						YES		YES						
	YES		YES			YES					YES			YES
YES	YES	YES	YES											YES
		YES												
YES	YES	YES	YES											
					YES		YES		YES	YES		YES		
						YES		YES			YES			

\*Storage performance is subject to the region's climate conditions and the proper preparation / application procedures for storage.

## Valve Sealants & Lubricants

### TEMP-GUARD™ High-Temp Grease

-25°F (-32°C) to 600°F (316°C)

TEMP-GUARD (formerly EZY-TURN HI-TEMP) is a high quality synthetic grease developed for high temperature applications. It contains both graphite and molybdenum disulfide, giving the product both low friction and extreme pressure capabilities. The synthetic fluid in this product provides exceptional low temperature flow characteristics as well as high temperature stability. TEMP-GUARD's inherent oxidation resistance is further enhanced with high temperature carbon controlling antioxidants.

Applications: Plain and anti-friction ball and roller bearings, kiln bearings, crushers, crane ladles, press and hammer guides, high temperature blowers, fans and oven conveyors.



### SILICONE COMPOUND DM™ Moisture-Proofing Non-Conductive Lubricant

DM-3: -50°F (-46°C) to 400°F (204°C) DM-2: -70°F (-57°C) to 400°F (204°C) • NSF H1 Registered & Halal Certified • Dielectric strength: >500volts/mil • Conforms to: MIL-S-8660C (DM-3), MIL-C-21567A (DM-2), NATO Code #S-736

SILICONE COMPOUND DM provides excellent lubrication and sealing properties for plug and gate valves, stuffing boxes, o-rings and vacuum and pressure systems. SILICONE COMPOUND DM will not harm most elastomers and plastics. Ideally suited for subzero processing and freezer applications.

*Note: Not recommended for use on surfaces to be painted.*



## Anti-Seizes

### KOPR-KOTE® ANTI-SEIZE Copper Anti-Seize & Thread Lubricant

-65°F (-54°C) to 1800°F (982°C) • K-Factor: 0.15 • NSF H2 Registered (Bulk) • MIL-PRF-907F • Raytheon -Spec M8656839 Type I • Load Rating -80,000 psi • 10% pure metallic copper flake • NSN #8030-01-239-8703 • Not Classified as a Marine Pollutant • DOT approval CA2004080025 • Contains no VOC's, lead or zinc • Available in Bulk & Aerosol form



KOPR-KOTE ANTI-SEIZE is a combination of copper flake, graphite and other extreme pressure additives, blended into a food grade grease base that helps properly distribute all the components on the surface of the fastener or the metal surface needing lubrication. This particle distribution is necessary to achieve the .15 K-Factor and aids in the break out process by reducing metal-to-metal contact that can cause friction, heat and damage to the threaded surface.

### 550® EXTREME® Low "E" Nonmetallic Anti-Seize and Thread Lubricant

Select Applications/Services: 2400°F (1316°C) • Brushable to or as a lubricant: -10°F (-23°C) • Static Applications: -265°F (-165°C)\*\* ( \*\*Based on component literature data in cryogenic applications.) • MIL-PRF 907F • Raytheon Spec M8656839 Type II • K-Factor: - .17 • Blend of Molybdenum Disulfide & Special Oxidation Resistant Graphite • No VOC



- K-Factor:
- 1" Uncoated" B7 Studs @ 80 ksi 0.15
  - 1" Uncoated" B7 Studs @ 50 ksi 0.18
  - 1" Uncoated" B7 Studs @ 30 ksi 0.19

550 EXTREME anti-seize compound is an enhanced formulation of our 550<sup>+</sup> product. 550 EXTREME is the ideal product for petrochemical plant maintenance needs. Its homogeneous composition offers maximum protection against seizure and heat freeze, eases assembling and dismantling, and saves maintenance hours. This anti-seize lubricant assures protection against rust, oxidation, and corrosion. It will not harden, evaporate, or settle out; and it requires no thinning. In addition to molybdenum disulfide (MoS<sub>2</sub>), graphite, and low friction fillers, 550 EXTREME utilizes a complex base grease that is fortified with effective rust and corrosion inhibitors and inherent anti-wear properties. As an added benefit, of 550 EXTREME, when compared to other anti-seize compounds containing greater than 40% molybdenum disulfide is the coefficient of friction of 550 EXTREME is less sensitive to temperature.

### SILVER PLUS REGULAR Anti-Seize and Thread Lubricant

-65°F (-54°C) to 1800°F (982°C) • K-Factor: 0.16 • 15% Pure Metallic Content (Copper & Aluminum) • No VOC



SILVER PLUS REGULAR is a heavy-duty blend of aluminum, copper and graphite lubricants in a petroleum grease base. It is a non-drying, soft-set anti-seize, specially formulated to work with aluminum, carbon steel, black iron and rough cut threads. SILVER PLUS REGULAR protects metal parts from rust corrosion, seizing and galling up to 1800°F (982°C). The micro-sized particles produce a smooth consistency and allow it to quickly coat fine threads and small and large diameter fasteners. The metallic components make it very conductive and, because the primary anti-seize particle is aluminum, it eliminates the potential for galvanic corrosion.

### NIKAL® High-Temp Anti-Seize & Thread Lubricant

-65°F (-54°C) to 2600°F (1427°C) • K-Factor: 0.15 Carbon Steel Alloy @ 60,000 PSI Contact Stress • MIL-PRF-907F | (NUCLEAR) Conforms to the requirements of NAVSEAINST 9210.36B



NIKAL is a premium anti-seize and gasket compound engineered for extreme temperatures and harsh environments. Upon exposure to high temperatures, its carrier volatilizes and deposits a nickel metallic plating on threaded connections, preventing metal-to-metal contact and guarding against seizing and galling. Formulated with pure nickel flake and nearly inert dispersing solids in a high-quality complex base grease, NIKAL provides unsurpassed protection from rust by water penetration or water wash-off. Its unique solids package forms a matrix of particles that settle in successive layers or "sandwich," acting as a lubricant, cushion, and seal—eliminating the risk of welding under compaction. NIKAL NUCLEAR exceeds all purity level standards for nuclear grade products. Used extensively in nuclear power generator facilities on land and sea, where only certified products are allowed. Ideal applications: Burner tips, reactor bolts, heat exchangers, manifolds, furnace hinges, manhole studs, and pipe fittings.

### SS-30™ EXTREME Anti-Seize Thread Lubricant and Conductive Termination Compound

-65°F (-54°C) to 1800°F (982°C) • Clay Grease Thickener • MIL-PRF-907F • Load Rating - 80,000 psi • K-Factor: .13 • 30% Pure Copper Flake • No VOC • NSN #8030-00-180-6315



SS-30 EXTREME is 30% high purity/refined copper flake, mixed in a high temperature, non-melt, grease base formula that not only aids in conductivity, but will work ideally as an anti-seize compound for threaded fasteners and cable connections. SS-30 EXTREME literally copper plates mated surfaces to improve conductivity or ground continuity. The same is true for threaded fasteners. The highly concentrated copper flake works as a copper plating material under load or compression to work as a dissimilar metal between surfaces, which is a key factor for an anti-seize compound to perform properly.



# Greases

## ALCO-EP-73 PLUS™

### Premium Multipurpose Grease

-25°F (-32°C) to 450°F (232°C) • Superior rust and corrosion protection • Dropping point - 500°F (260°C) • Polymer additives for extreme water resistance • Color - Red • Exceeds Military spec MIL-G-18458B-SH

ALCO-EP-73 PLUS is a premium, state-of-the-art, multipurpose aluminum complex grease containing a highly synergistic blend of rust and oxidation inhibitors plus extreme pressure and anti-wear additives for maximum performance characteristics. ALCO-EP-73 PLUS also contains polymer additives, further enhancing the inherent water resistance of an aluminum complex based grease. This multipurpose grease is extremely resistant to rust and corrosion and suited for use in high moisture areas. It's specially formulated and developed for subsea or other conditions where extreme water resistance is necessary. The highly developed additive package makes ALCO-EP-73 PLUS the premier, multipurpose grease for hostile environments



## ALCO-EP™

### Premium Multipurpose Grease with Moly

-25°F (-32°C) to 450°F (232°C) • Protects against rust and corrosion • Dropping Point - 500°F (260°C) • Protects against extreme pressure, shock load, welding and scoring • Forms a protective barrier to reduce wear and extend service life

ALCO-EP premium multipurpose grease is a versatile, aluminum complex grease with a high level of rust and oxidation inhibitors, as well as CZ-EX®, Jet-Lube's extreme pressure additive. ALCO-EP also contains molybdenum disulfide (MoS<sub>2</sub>) and graphite, which plate out to resist metal-to-metal contact. This grease provides superior wear protection against extreme pressure and is highly water resistant. Its 60 pound rating in the Timken Load Test proves ALCO-EP has excellent load-carrying ability. ALCO-EP is designed for friction and anti-friction bearings, bushings, chassis points, U-joints, pivot pins, and a wide range of other industrial, fleet and equipment applications.



## JET-PLEX EP™

### Premium Multipurpose Grease

14°F (-10°C) to 572°F (300°C) • Will not run or pound out • Pumpable hot or cold • Extremely resistant to rust and oxidation • Color - Red • Available in NLGI 2 grades

JET-PLEX EP is the ideal multipurpose grease for use in extreme pressure and high temperature operating conditions. JET-PLEX EP is manufactured from carefully selected petroleum oils and lithium complex soap to create a multipurpose grease with a dropping point of 550°F (288°C). JET-PLEX EP has excellent resistance to water and water washout. JET-PLEX EP is formulated with special lubricity, anti-wear, and extreme pressure additives and fortified with rust, corrosion and oxidation inhibitors. JET-PLEX EP is recommended for all types of bearing and sliding applications, for shock-loading, pounding, rough chassis usage and high loads.



## JET-GOLD™ EP

### Premium Multipurpose Grease

12°F to 400°F (-11°C to 204°C) • Meets the DIN 51502 standard: KP2R -20 • Long Life - reduced lubrication frequency • Water Resistant • Wide Speed Range • Color - Peanut Butter

JET-GOLD EP is designed for demanding applications involving extreme pressure, water, heat, or chemical attack. The thickener system in JET-GOLD EP provides protective benefits similar to molybdenum disulfide, safeguarding equipment from wear under extreme load and slow speed conditions. JET-GOLD EP is effective in neutralizing acids and resisting reactions with caustic materials. It also prevents corrosion when exposed to phosphoric acid fumes. JET-GOLD EP 2 is the preferred grade for electric motor bearings. JET-GOLD EP 2 may be used at DN speeds up to 250,000.



## #202 MOLY-LITH™

### Multipurpose Grease with Moly

0°F (-18°C) to 300°F (150°C) • NLGI Grade 2 • Contains Molybdenum Disulfide (MoS<sub>2</sub>) for friction reduction and high load capacity • Superior metal adhesion • Pumpable • Resistant to water, heat, weathering and oxidation • Color - Black

#202 MOLY-LITH is a high temperature, lithium 12-hydroxystearate soap grease containing micro-fine molybdenum disulfide (MoS<sub>2</sub>). #202 MOLY-LITH has a dropping point of 390°F (199°C), is water resistant and displays excellent work stability under high loads, high speeds, shock and vibration.

#202 MOLY-LITH has exceptional resistance to the effects of heat, water, weathering, oxidation and heavy loads. It contains rust, corrosion and oxidation inhibitors. #202 MOLY-LITH gives unbeatable protection anywhere that dirt, dust, high humidity, rain and adverse temperatures are critical problems.

#202 MOLY-LITH is recommended for automotive and industrial applications, including all grease fittings where semi-solid or plastic consistency grease is normally used. Also for use in grease cups, pre-sealed bearings and for general chassis lubrication.



## ARCTIC™

### Extreme Cold Temperature Grease

-65°F (-54°C) to 225°F (107°C) • Dropping point of 285°F (141°C) • Contains no solid additives • Extremely resistant to salt spray • All temperature formula-effective winter or summer • Water resistant • Rust and corrosion resistant • Color - Amber

ARCTIC is particularly suitable for use in extreme cold environments such as cold rooms, cold storage lockers, ice plants, and on refrigeration or cold storage equipment. It will resist such environmental contact as humidity, ice, and road salts without hardening, washing off or deteriorating. ARCTIC is an excellent service grease that has passed the Shell Roll Test for 100 hours at 150°F (66°C), and passed Federal Test Method Standard No. 791B, Method No. 3454.2 "Leakage Tendencies of Automotive Wheel Bearing Greases" and ASTM 1263. It also passes the application salt-spray resistance and rust tests required by the United States Government for its severe environmental contact greases. ARCTIC may be used on automobiles and aircraft, in industrial applications, or anywhere lubricating properties of a moderate to severe nature are required over a wide range of temperatures.



## JET-RED™

### Premium Multipurpose Grease

EP1 -10°F to 300°F (-23°C to 149°C) | EP2 0°F to 400°F (-18°C to 204°C) • Highly versatile • Protects against rust and corrosion • Pumpable • Highly adhesive to metal • Resistant to heat, water, oxidation and heavy loads • High film strength • DN speeds up to 200,000 • Color - Red • NLGI Grade 1 & 2

Versatile, high-temperature lithium complex grease designed to meet a wide range of lubrication needs. JET-RED offers superior protection in environments with dirt, dust, high humidity, rain, snow, and extreme temperatures due to its high dropping point and exceptional resistance to heat, water, oxidation, and heavy loads. This multipurpose grease is specially formulated to provide lubrication for bearings, journals, and other greasing applications. Its versatility makes it ideal for use in oil drilling, construction, road building, mining, shipbuilding, and any other application that requires high-quality lubrication.



## Thread Sealants

### V2®

#### Multipurpose Pipe Thread Sealant with PTFE

-70°F (-57°C) to 500°F (260°C) • NSF 61 Registered, ULC Registered #121265 • #21265 • Uniform Plumbing Code: IAPMO #1282 • Biodegradable • MIL-TT-S-1732 • No VOC • Seals to 10,000 psi (Liquids), 2,000 (Gases) • Brushable to 0°F (-18°C) • Contains PTFE • Safe to use on PVC & Fiberglass Fittings • No Odor

V2 is a combination of vegetable oil, PTFE and inert fillers that are environmentally safe, nontoxic for use in potable water applications, on NPT and standard pipe fittings. It's a soft setting product, so you can remove the fitting without damage to the threads. This formulation also has rust and corrosion inhibitors built in so the connection/fitting will not rust or corrode. V2 also has a bacteria/fungistat which is a food grade additive that will eliminate bacterial culturing.



### TF-25™

#### Line Pipe and NPT & Anti-Seize Thread Sealant

-100°F (-73°F) to 600°F (316°C) • Contains PTFE & Graphite • Brushable to 0°F • Soft Setting Formula • Non-Melt Formula • Chemically Inert • Pressures to 10,000 psi liquid and 2,000 psi natural gas & air

TF-25 is a thread sealant that has anti-seize characteristics, where standard thread sealants do not have the ability to handle dual function applications. TF-25 performs both functions of sealing the threads on large diameter connections (3 1/2" and above), while also working as an assembly and disassembly lubricant. The ingredients are inert, noncorrosive, and ideal for natural gas, hot oils, desolate materials and wastewater applications. TF-25 is ideal as a thread sealant where loose fittings or worn threads are present, on imperfectly cut threads or where thread damages have occurred. TF-25 may be used on both ferrous and nonferrous metals.



### PETRO-TAPE™

#### Heavy-Duty Thread Sealant Tape

-400°F (-240°C) to 500°F (260°C) • 3-Mil Thickness • Conforms to CID A-A-58092 (MIL-T-27730A) • Inert Properties • Chemical Resistant • Pure Virgin Polytetrafluoroethylene • Canada ULC Listed



PETRO-TAPE is inert, highly resistant and impervious to salt water, fuels, refrigerants, acids and alkalis, including kerosene, cleaning fluids and gases. Immediate pressurization of the joint is possible. This 3-Mil tape will not tear easily, as the combination of polymers actually stretch and expand to develop a tight seal. When the NPT fitting is assembled to the pipe, the Petro-Tape will not tear or ball up in the threads during assembly which can cause leak patterns to develop.


### PETRO-TAPE™ NICKEL

#### Heavy-Duty Thread Sealant Tape

-450°F (-267°C) to 550°F (287°C) • ≥4 MIL Thickness • Conforms to CID A-A-58092 • Inert Properties • Chemical Resistant • Pure Virgin Polytetrafluoroethylene • Full Vacuum to 10,000 psi



PETRO-TAPE NICKEL is a thick, premium-density tape that permits quick, clean sealing of threaded pipe connections. Its PTFE base provides natural lubrication of the joint, while its nickel filler prevents galling of the threads which is common in stainless steel assemblies. PETRO-TAPE NICKEL contains a gray pigment for easy identification, and distinguishes it from lower density, general purpose thread sealant tapes. HEAVY DUTY - IDEAL FOR MULTIPURPOSE CONNECTIONS, SPECIALLY STAINLESS STEEL.

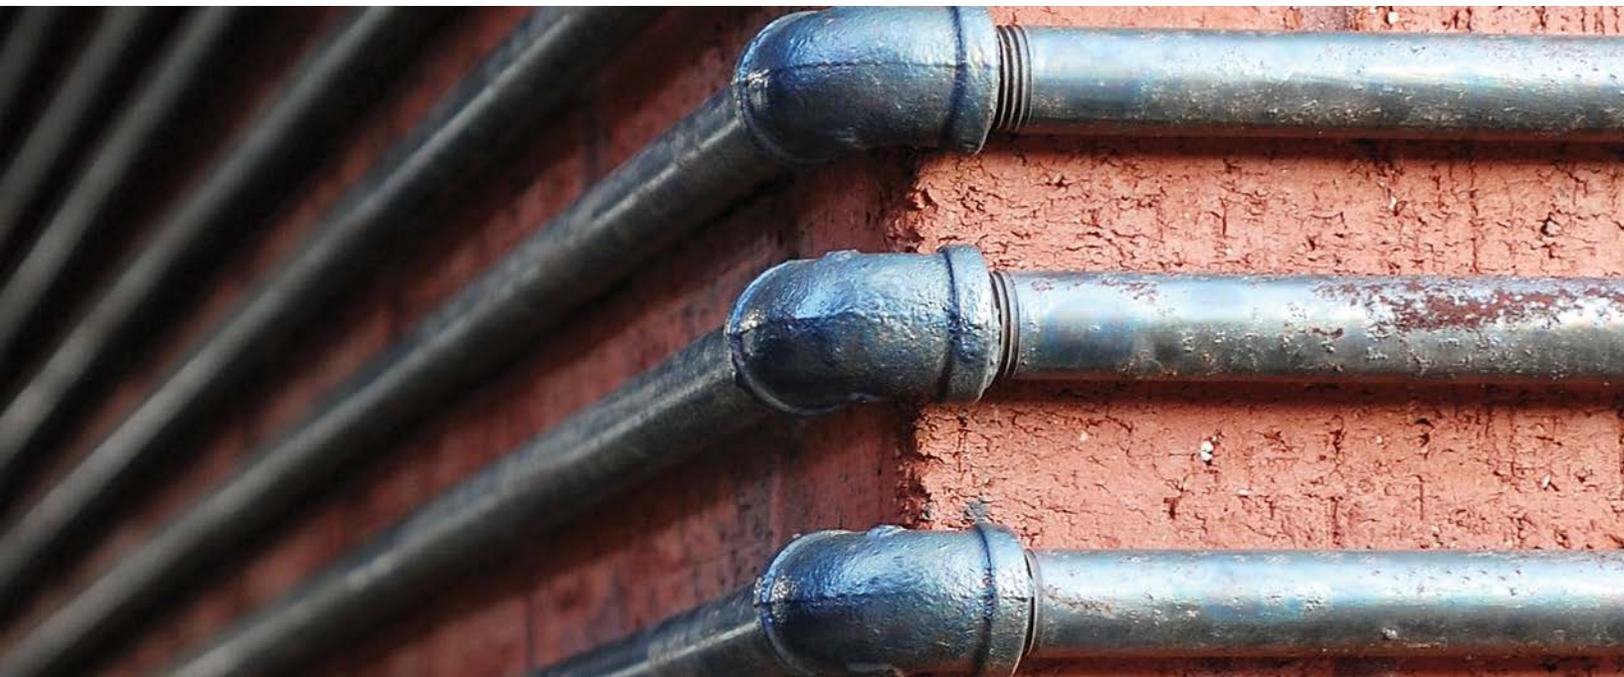

# Lubricants for Open Gear & Wire Rope Applications

## GEARGUARD™

### Premium Lubricant Paste

35°F (2°C) to 350°F (175°C)

- Brushable/Pumpable formula • Black, Sticky Semi-Fluid • Petroleum Oil Based Material • Contains Molybdenum Disulfide • Available in Bulk & Aerosol form

This product has been developed to coat and protect mating surfaces of opened and closed crown ring and pinion gears. Also used for "bull" gears, planetary ring gears and assemblies where high load contact protection is required. GEAR-GUARD contains molybdenum disulfide and graphite in a water resistance grease base so the product will not run, sling off or melt over time and cause exposure to the elements. This combination of durable and flexible components produces a thin film on the gears, eliminating metal-to-metal contact which will reduce surface heat and wear.



## WLD™

### Wire Rope, Cable and Roller Chain Dressing & Lubricant

Non-Melt Grease Base • 35°F (2°C) to 350°F (175°C) • Black Brushable Formula • NSN # 9150-01-179-0228 • Available in Bulk & Aerosol form

WLD is a blend of petroleum and organic resins that aid in adhesion properties and make WLD highly water resistant. This formula is a coating for long-term storage to protect exposed wire rope. It's ideally suited for spooling applications where pneumatic lubricators are present for applying wire rope lubricants. WLD's special blend of rust and corrosion inhibitors will eliminate oxidation and is UV protected. It will not run or drip off during transport or storage. The barrier film of WLD protects against the formation of rust and prevents "rust binding," which reduces cable flexibility and life, increasing friction and wear. WLD is well suited for walking dragline applications and as a lubricant for wire line guides and sheaves. WLD has the ability to penetrate in a working environment, protecting the inner core strands of the cable or rope.



## OG-H™

### Heavy-Duty Open Gear Lubricant

0°F to 550°F (-18°C to 288°C) • Non-Melt Grease Base • Brushable Formula • Black Sticky Paste

This blend of mineral oils, MoS<sub>2</sub> (Molybdenum Disulfide) and graphite combined with rust and corrosion inhibitors are ideal for open, outdoor surfaces. OG-H is specially formulated for gears, gearboxes, trunnion rollers and thrust rollers. OG-H is for gears that drive large kiln drying units.

OG-H is a brushable and pumpable formula, so applying the grease to flat, tapered or open gears is easily done using a conventional paint brush or pneumatic pumping system. This uniformly blended combination of low friction ingredients provides a high film strength which reduces starting torque and lowers operating temperatures.



## WRL™

### Wire Rope & Chain Lubricant

-40°F (-40°C) to 320°F (160°C)

- Petroleum Oil • Color - Beige • Solvent-Free • Pumpable • Available in Bulk & Aerosol form

All wire ropes contain numerous moving parts that require lubrication. Each time the rope bends or flexes, the internal strands rub together causing friction, heat and wear. WRL has a blend of additives that coat, cover and protect the strands from the weathering conditions caused by offshore environments. This lubricant is highly resistant to rain and salt water atmospheres, and ideally suited for offshore cranes and lashing lines. WRL is formulated with rust and corrosion additives so it's ideal for lubricating wire rope, forklifts and any application that needs lubrication without attracting dirt and grime. WRL can also be used for cable pull systems and lines on amusement park rides.



## MARINE WIRE ROPE & HAWSER GREASE™

### Lubricant & Protectant

-10°F (-23°C) to 325°F (163°C) • MIL-PRF18458B (SH) • Color - White/Beige • Nonstaining • Water Resistant • AntiCorrosive • Nondrying • NLGI Grade 2

This multipurpose product is suited for applications where general purpose marine grade grease is used to lubricate metal, galvanized or black ropes that are exposed to sea water and high humidity environments. This tenacious product is easily pumped with pneumatic pumping systems or can be applied by a brush or swab. MARINE WIRE ROPE & HAWSER GREASE is recommended for all marine hawser and related elevator hoists, rig anchor cables, or any rope that operates in harsh offshore environments.



# Penetrants, Coatings & Specialty Products

## 769 LUBRICANT®

### Nonflammable Penetrant/Lubricant/ Moisture Displacer/Protectant

NSF H2 Registered (Bulk) • 35-40 KV Dielectric Strength • Nonflammable • Nonevaporating • Contains No Silicones • MIL-PRF-81309H (Aerosol) Type II & III, Class II, CO2 Grade • MIL-PRF-81309H (Bulk) Type II & III, Class I • MIL-C-16173E Grade 3 • MIL-C-23411A VV-P-216B • CID A-A-50493C Class B Type I • Available in Bulk & Aerosol form



769 LUBRICANT is the leading lubricating, penetrating, moisture displacing, and corrosion preventative coating on the market. Unequaled where salt water, salt spray or other harsh environments are present. 769 LUBRICANT gives total performance while being environmentally safe, easy to use and nonflammable.

Lubricates: Contains ashless, extreme pressure additives and highly refined lubricating oils that provide superior lubricating protection and anti-wear properties.

Penetrates: Rusted and frozen metal parts - studs, nuts, screws, pins, linkages are easily loosened by means of superior "creepability."

Removes Moisture: Moisture is lifted and displaced rather than trapped. Pores and crevices of surfaces are freed from moisture and are coated with a thin, non-greasy film that prevents additional moisture from clinging or entering.

Prevents Rust & Corrosion: Thin film adheres to metallic surfaces, providing positive, temporary protection against the formation of rust and corrosion, including electrolytic and galvanic corrosion common in salt environments.

## 12|34®

### Lubricant & Penetrant (Available only in CA)

Contains No Fluorocarbons or Silicones • Economical to use • Non-evaporating • Non-conductor • Chemically stable • Never hardens or dries out • Meets the requirements of MIL-PRF-81309 • -100°F (-75°C) to 300°F (150°C)

An industrial penetrating, moisture displacing, lubricating and corrosion preventative. Unequaled where salt water, salt spray or other harsh environments are encountered. 12|34 gives total performance while being environmentally safe and easy to use.

Lubricates: Contains ashless extreme pressure additives and highly refined lubricating oils which provide superior protection and anti-wear properties.

Penetrates: Rusted and frozen metal parts - studs, nuts, screws, pins, linkages - are easily loosened by means of superior 'creepability'.

Removes Moisture: Moisture is lifted and displaced rather than trapped. Pores and crevices of surfaces are freed from moisture and are coated with a thin non-greasy film that prevents additional moisture from clinging or entering.

Prevents Rust and Corrosion: Thin film adheres to metallic surfaces, providing positive, temporary protection against the formation of rust and corrosion, including electrolytic and galvanic corrosion common in salt environments.

Cleans: Low viscosity dissolves grease and oil for easy removal. Cleans dirt, dust and grit for easier penetration and quicker rust-busting.



## C-PLATE

### Copper Dry Film Coating

Aids in the break-in process of freshly-cut threads • Low VOC's • Lead & zinc-free • Air-cures at room temperature in 4 to 6 hours • Forms a durable, acid-free, corrosion-resistant finish • Contains no ozone-depleting substances • Fast evaporating • Prevents galling during break-in process • Greaseless, solid-film protective coating • Acid-free film



C-PLATE provides a durable micro-thin coating of copper to machined surfaces, aiding in preventing galling during the break-in process. The micro-sized copper flakes adhere to the steel, utilizing a high-tech resin that air cures at room temperature in 4 to 6 hours. With the addition of heat, an even stronger, more durable bond may be achieved. Once cured, C-PLATE forms a durable, acid free, corrosion resistant finish which can be burnished into the steel surface during the initial work hardening of the threaded connection. The thin copper coating provides a dissimilar metal which acts to prohibit the metal-to-metal contact under bearing loads which may cause galling damage to threaded connections.

## Z-PLATE

### Zinc-Rich Galvanizing Compound

Fast Evaporating • Color - Grey • Cone Spray Water Displacing • Dry Film • Long-Term Coating • 95% Pure Metallic Zinc • Rust & Corrosion Inhibited

Z-PLATE Prevents: Rust and corrosion with galvanic action equal to hot-dip galvanizing. 95% pure zinc compound which forms a tough, durable and flexible coating.

Z-PLATE Repairs: Galvanized surfaces damaged by cutting or welding. Primer for surfaces to be painted. Protects against salt water. It requires little surface preparation. Z-PLATE is excellent for cosmetic repairs to welded joints, guard rails, bridges, fencing, storage tanks, pipe lines, TV towers, metal buildings, heavy equipment, heat ducts, marine and offshore equipment.



## RUST-GUARD

### Corrosion Inhibitor

Contains No Fluorocarbons • Indoor & Outdoor Formula • MIL-PRF-16173E, Grades 1 and 2 • Nontoxic • Available in Bulk & Aerosol form

RUST-GUARD is a specialized water displacing formula which dries to a uniform, thin waxy film to effectively seal out moisture and corrosion. RUST-GUARD provides long-term protection on all metal and alloy surfaces, even under harsh environmental conditions such as water, high humidity or salt spray. RUST-GUARD's bulk formula typically provides six months outdoor and one year indoor protection against rust and corrosion. RUST-GUARD may be used indoors or outdoors as a protective coating on raw materials, machined parts, tools, pipe, fittings, valves, etc., while they are being stored or in transit. RUST-GUARD will not crack or flake off, it penetrates fully into even the smallest crevices to displace moisture and prevent rust and corrosion. RUST-GUARD is green in color to provide a visual check of product application and is easily and safely removed by use of a safety solvent such as CLEAN-UP or CLEAN-UP PLUS.



## Penetrants, Coatings & Specialty Products

### MOLY-MIST™

#### MoS<sub>2</sub> Dry Film Lubricant

Noncorrosive • Bonds to Most Porous & Nonporous Metals • -300°F (-184°C) to 750°F (399°C) • Available in Bulk & Aerosol form

MOLY-MIST lowers friction, prevents galling, seizure, stickslip, fretting, corrosion and metal-to-metal contact. It reduces torque and power consumption. MOLY-MIST can be applied while equipment is in motion, it deposits a coating of MoS<sub>2</sub> (Molybdenum Disulphide) on hard to reach surfaces of fixed, moving or irregular parts. MOLY-MIST is used wherever a dry lubricant is needed, particularly where temperatures are extreme, where environments are hostile, and where friction must be kept to a minimum.

MOLY-MIST provides the initial lubrication protection that is needed where conventional lubrication in most cases cannot. Its low coefficient of friction, bonding tenacity, and ability to sustain lubrication make MOLY-MIST a pre-assembly necessity. Lubrication – or lack of lubrication – on the first pass or revolution of a wearing surface to a large extent determines the life of a component. New parts contain rough surfaces in the form of microscopic imperfections. Use of MOLY-MIST during initial “running in” period will provide extended service life.



## Cleaners & Degreasers

### CLEAN-UP™ II

#### Low VOC Degreaser

Low VOC Formula • Residue Free  
• Ozone Friendly • Replaces 1:1:1 Trichloroethane

CLEAN-UP II is a specially formulated low VOC blend of organic solvents designed to quickly dissolve and rinse away dirt, grease, grime, oil, tar and wax while being both environmentally responsible and ozone friendly. The product contains no chlorinated or fluorinated solvents, no hazardous air pollutants and evaporates residue-free quickly. This product is California compliant and acceptable for use in CARB/OTC States.

CLEAN-UP II starts working immediately on contact, breaking down and dissolving even stubborn contaminants without the use of fluorinated, chlorinated or SARA listed ingredients. Safe on all metals and some plastics. For sensitive materials, test on an inconspicuous small area first to determine acceptability. For electrical services the system must be off and time given to evaporate before re-energizing the system to avoid flash or fire.

### CLEAN-UP™ PLUS

#### Citrus Degreaser

NSF C1 Registered • Replaces 1:1:1 Trichloroethane • Nonflammable • Natural Organic Formula • Ozone Friendly • Biodegradable • 29KV Dielectric Strength • Available in Bulk & Aerosol form

CLEAN-UP PLUS is a high-performance blend of safe, organic solvents that quickly dissolves and rinses away dirt, grease, grime, oil, tar, and wax, while being both environmentally safe and ozone friendly. It works immediately on contact, breaking down and dissolving even the most stubborn contaminants without the use of fluorinated, chlorinated or SARA listed ingredients. CLEAN-UP PLUS slowly evaporates while cleaning, leaving a residue free surface. This degreaser is safe on all metals and most plastics.



## Valve Lubricant/Sealant Comparison

JET-LUBE®	CHEMOLA DESCO	CLIMAX	COOPER/CAMERON	FMC	HUSKEY	LUBCHEM	NORDSTROM BRT/AUDUCO	OCR	PLUSCO	R-S CLARE & CO	SEALWELD	VALTEX	ABB VETCO GRAY	W-K-M	OTHERS
EZY-TURN® #2	600, 660 / 111	400 / 600 / 650 / 800			#6	#1, #4	555 WG, X196, X184, 357	600 / 1 / 619 / 603HV	508 Environmentally Safe Gate Valve Lubricant & Sealant		Equa-Lube 80	60 / 80	Y002 / VGS 5.3100-1.2	112,105	Daniel Type 1 Size B
EZY-TURN® #2 (Stick Grade)	600, 660	800	0315452701 (stick) 0315452702 (stick)	3256666 (K Stick)	#6	#1, #4		603HV	503 HV			80 Stick			Daniel Type 1 Size B
EZY-TURN® #3	111 (HS) 955, 800	900, 800, 600, 650		G70200		#3	555 / 357 / X184 / 167 / 950 / 755 / 835	600 / 3 / 603HV / 111 Synthetic		C.M. Compound	Equa-Lube 80	PL 1000 / Valtex 700, 60		105	Wetherford Well Cat
EZY-TURN® #3 ARCTIC				G70303				603HV							
EZY-TURN® #4	422 / DESCO 955 / Chemofluor 100W	350A Poly Seal3 / 900	MOLY 101			117 / Everlast #3	735 / 421 / 921 / X-195 / 167	MP 1672	507	Valve Lube 601	855	50 / 40 / 80 HM / 700 / 972, 2000			RDI 6430 (stick grade)
EZY-TURN® #4 PLUS	DESCO 955 / 1055							FracJack 21 Valve Lubricant SandGuard		Valve Lube 601	Winter Lube # 7030				
EZY-TURN® #5	600, 800	650, 800	See EZY-TURN #2	P/N 3256666 (stick)	#4		555, 654	603HV / 611 (stick) / 600/1	503 HV			85, 1502			
EZY-TURN® #7	433, 622	650, 800			#6	#1, #4	733	635 / 603HV / 635 Hi-Tech				750 (stick)	VGS 53100.1	112/105	RDI 2015 (stick)
EZY-TURN® #12	620	102-SWS & 110				102 Special & 196 Special		606, 616, 628	506 & 509 Peanut butter valve lubricant			60		102	McEvoy RS 1608
EZY-TURN® PVS		972				117	950	603HV							
EZY-TURN® H.S	SS-14 / Desco 660 / Desco 111HS / Desco 111 (HT)	340 360HS	PS-1-1605 / PS-1-1604 / TS-41H / 71383711 / 71383712 / 71383713 / 700677 / 71383714			50-500 / 50-300 / 50-400	X-184 / 950	1652 Valve Guardian / 1656 Guardian II / 619 / 1111		701	D-1014 / 911	972 / 65 / 75, 700	VG 193530	375	Magnalube
EZY-PAK™ HCR	#62		J Stik 022176-06-000-00			TFE Self Mold	Stem Packing	611						109, 115	
EZY-TURN® #196	Desco TFE Seal 104 / 108							635 Hi-Tech Synthetic		RS Care 701		700			
EZY-OPEN™ (Liquid)	Valve Cut	VCS									Valve Cleaner	Valve Flush			
EZY-OPEN™ (Gel)	Desco Valve Flush NSR	Valve Turn			Valve Cheater	Valve Saver	VPX Valve Purge VXX Valve Cleaner	613			VC Plus	Valve Flush-VF-CTN			
EZY-TURN® POLAR	HS-LT 111 (LT)	901 / 220 / Frosty	PS-1-1604 / 700671 / 700672 / 700673 / 700674 / HS-14	G70302		LONGLIFE ARCTIC / BP ARCTIC / ELT-100	862 / X-183	610, 622	511 AG	L.T. Valve Lube & H.L. Low Temp ES 710		505	Y004 VGS 5.3100.3; LT-200	110	Mosul Lubricants SAM 4012B
EZY-TURN® BODY FILL	TF-41 960	S-100	700667 / 700668 / 700669 / 700770 / PS-1-1603 / 700676 / 700149 / TF-41	G70100	Body Fill	LONGLIFE 1600 (closer to Jet-Lube CB-2) / 196	X-208	1600 Valve Guardian / 742 Gate Valve Lube / 1640 Valve Guardian	515 Semi-Synthetic Well Head Valve Lubricant	G.P. Valve Grease		1000	VG 193529	108	
EZY-PAK® EXTREME	Desco Black Stem Pak HT														
TEMP-GUARD™				G 70111									V5.3100.2		
SILICONE COMPOUND DM	244	204 (MP 511) 6611 (DM-3)	TM-41	DM-1 G70400 DM-2 G70600			921, 234	NC 111 or 1111	507 CO2 Resistant Valve Lubricant & Sealant		Silicone Lubricant	202		101 Valve Seat Seal = DM-5 NLG1 #3 Valve Lube = DM-3	J.M. HUBER RESUN SEALANT #101 / McNett Corp Silicone grease
EZY-PAK™ ARCTIC	Arctic Pak & Silicone Pak 2511					Low Temperature Pak									

Each compound is manufactured using only proven formulas for high and low temperatures and a full range of valve and service conditions.

## Reference

### Lubricants

Product	Temp	NLGI	Color	Marine	Features
GEAR GUARD™	35°F to 350°F (2°C to 175°C)	1	Black		Ideal for all heavily loaded applications
WLD™	35°F to 350°F (2°C to 175°C)	1	Black	Yes	Ideal for use in salt water environments
OG-H™	0°F to 550°F (-18°C to 288°C)	3	Black		Highly adhesive and easy to apply
WRL™	-40°F to 320°F (40°C to 160°C)		Amber	Yes	Provides a non-drying, non-tacky film
MARINE WIRE ROPE & HAWSER GREASE™	-10°F to 325°F (-23°C to 163°C)		White/Beige	Yes	Economical for requiring a water resistant, tenacious product

### Anti-Seizes

Product	Specifications	Temp Range	K-Factor	NSF	Recommended ASTM Specs	Features
KOPR-KOTE™ ANTI-SEIZE	Exceeds MIL-PRF-907F	-65°F to 1800°F (-54°C to 982°C)	0.15	H2	A307, A354, A193/A193M, A320/A320M, AF468, A563, F467	Ideal for high temp, stress and load applications. Not recommended for aluminum fittings and fasteners
550™ EXTREME™	Exceeds MIL-PRF-907F Raytheon Spec M856839 TYPE II	-65°F to 2400°F (-54°C to 1316°C)	@ 80 ksi 0.15 @ 50 ksi 0.18 @ 30 ksi 0.19		A307, A354, A193/A193M, A320/A320M, F593, Ax562, F594, F467, A153, B960, B696	Enhanced formulation of 550 to better enable assembly and dismantling of threaded connections. General-purpose water resistant lubricant for use on steel, aluminum & cast iron
SILVER PLUS REGULAR		-65°F to 1800°F (-54°C to 982°C)	0.16		A307, A354, A193/A193M, A320/A320M, F468, A563, F467	Micro-sized particles allow it to quickly and easily coat fine threaded, small & large diameter fasteners
NIKAL®	MIL-PRF-907F   (NUCLEAR) Conforms to the requirements of NAVSEAINST 9210.36B	-65°F to 2600°F (-54°C to 1427°C)	0.15			For use in extreme temperatures and hostile environments
SS-30™ EXTREME	MIL-PRF-907F	-65°F to 1800°F (-54°C to 982°C) • Load Rating - 80,000 psi	0.13			High content of copper particles prevents metal-to-metal contact

### Greases

Product	Type	Color	Temp	Specifications	NLGI Grade	Marine	Features
ALCO-EP-73 PLUS™	Aluminium Complex	Red	-25°F to 450°F (-32°C to 232°C)	MIL-G-18458B(SH)	2	Yes	Premium multi-purpose grease used where tolerances are low and/or speeds are high
ALCO-EP™	Aluminium Complex	Black	-25°F to 450°F (-32°C to 232°C)		2		Premium multi-purpose grease with moly and graphite
JET-PLEX EP™	Lithium Complex	Red	14°F to 572°F (-10°C to 300°C)		1 & 2	Yes	Premium multi-purpose grease for extreme pressure and high temp
JET-GOLD™ EP	Calcium Sulfonate Complex	Peanut Butter	12°F to 400°F (-11°C to 204°C)	DIN 51502 standard: KP2R -20	1 & 2		Extreme pressure, multipurpose, water-resistant
#202 MOLY-LITH™	Lithium	Black	0°F to 300°F (-18°C to 150°C)		2		Multi-purpose grease with moly
ARCTIC™	Calcium	Amber	-65°F to 225°F (-54°C to 107°C)		2		Effective in extreme cold
JET-RED™	Lithium	Red	EP1 -10°F to 300°F (-23°C to 149°C) EP 2 0°F to 400°F (-18°C to 204°C)		1 & 2		Low cost, highly versatile

### Thread Sealants

Product	Specifications	Temp	Pressure	NSF	Features
V2™	MIL-TT-S-1732	-70°F to 500°F (-57°C to 260°C)	10,000 psi liquid 2,000 psi gases	61	Vegetable oil-based, soft-setting, for use with potable water
TF-25™		-100°F to 600°F (-73°C to 316°C)	10,000 psi liquid		Ideal for pipe diameters larger than 3 inches
PETRO-TAPE™	MIL-T-27730A, Canada ULC Listed	-400°F to 500°F (-240°C to 260°C)	2,000 psi natural gas & air		2mm thicker than the average tape. Fewer wraps to achieve an airtight seal
PETRO-TAPE™ NICKEL	CID A-A-58092	-400°F to 500°F (-267°C to 287°C)	10,000 psi		Ideal for multipurpose connections, specially stainless steel



has been a leader in the

development and manufacturing of high quality products since 1949. Jet-Lube is recognized by the NLGI (National Lubrication Grease Institute) as a master blender of grease products, by the ASTM for our research, test and R&D lab, and the U.S. government for our Mil-Spec test capabilities. Jet-Lube's reputation as an industry leader has been earned in the world's harshest environments and the most demanding applications.



Every effort has been given to ensure accuracy of information given in this catalog at the time of going to print. Given our policy of continuous improvement, we reserve the right to change specifications without notice. Customers must ensure that goods are suitable for the purpose intended. Not all products are available in all markets. For further details or to download our most up-to-date catalog

**Scan QR or visit [jetlube.com](http://jetlube.com)**

**DISCLAIMER:**

Provisions throughout this catalog that set forth (either express or implied) indications for the use or application of the products are suggestions for informational use only and lack the context of your particular needs. Whitmore Manufacturing recommends you consult obtain your Whitmore Manufacturing account representative or your distributor for technical advice. You will be solely responsible for determining the suitability of the product for the intended use and assume all risk and liability whatsoever in connection therewith.

WHITMORE MANUFACTURING EXPRESSLY DISCLAIMS ANY WARRANTIES, REPRESENTATIONS, GUARANTEES AND CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR THE PERFORMANCE OF THE PRODUCTS TO STANDARDS SPECIFIC TO THE COUNTRY OF IMPORT, WHETHER ARISING BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE.

Copyright © 2025 Whitmore Manufacturing, LLC. All Rights Reserved.

**jetlube.com**

**JET-LUBE - UNITED STATES**

930 Whitmore Drive  
Rockwall, Texas 75087  
800-538-5823  
713-670-5700

**JET-LUBE - CANADA**

Units 8 & 9, 1260-34 Avenue  
Nisku, Alberta T9E 1K7  
780-463-7441

**JET-LUBE - UNITED KINGDOM**

Unit 9, Foster Avenue  
Woodside Park Industrial Estate  
Dunstable, Bedfordshire LU5 5TA  
+44 1707 379870



Follow us on  
Social - Scan QR

For Product  
Numbers/Package  
Sizes & Types:

[jetlube.com/resources/  
product-index/](https://jetlube.com/resources/product-index/)



**JET-LUBE®**

JL 3/2026

*Jet-Lube is a brand and registered trademark Whitmore Manufacturing, LLC.*